



## MODEL: HUS-EX108

### QUICK INFO


Coldest Alfresco Beer Fridge possible is available with this specially designed under zero bar fridge.

You can choose your temperature with a simple touch button control and then you have 2 x special choices to make drinks cold, the TURBO mode gives 1 hr at -5°C and Party Mode runs at -5°C to ensure the coldness in times of extreme need.

Heated glass stops condensation.

### PARTS AND ENERGY INFO

- Cyclopentane foaming
- LED lighting
- R600 100% ozone safe gas
- High Quality Chinese Compressor
- High Quality Chinese Bearing Fan
- Chinese Reliable Transformer

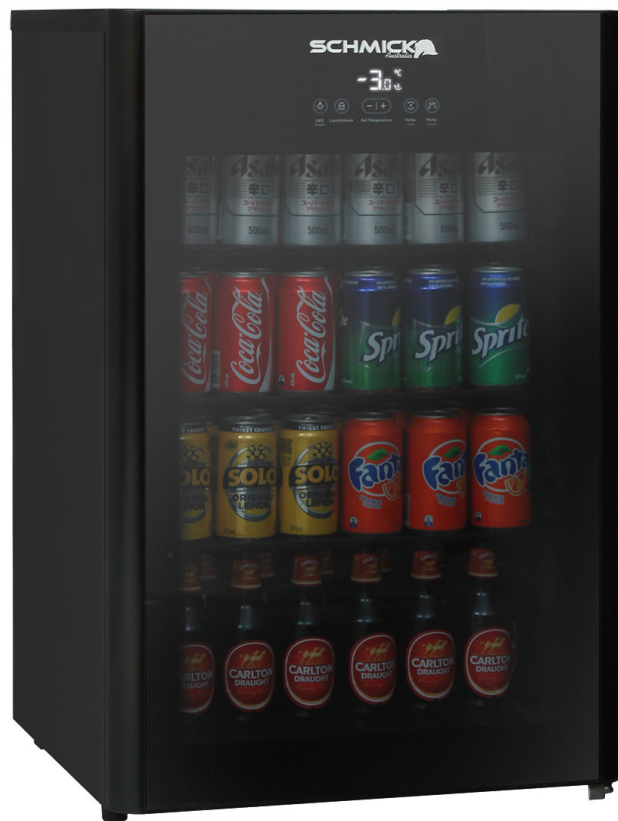

### SPECIFICATIONS

Capacity (litres)	108
Holds (cans)	108
Noise Level	45
Consumption	2.70Kwh/24Hrs
Unit dimensions (WxDxH)	560 x 500 x 845
Lockable	No
Gross weight	50 kg


**SCHMICK**   
Australia

\*\*Specifications and price of this product may change at any time

\*\*For more information about this product please call us or visit our website.

# PRODUCT INFORMATION

## HUS-EX108

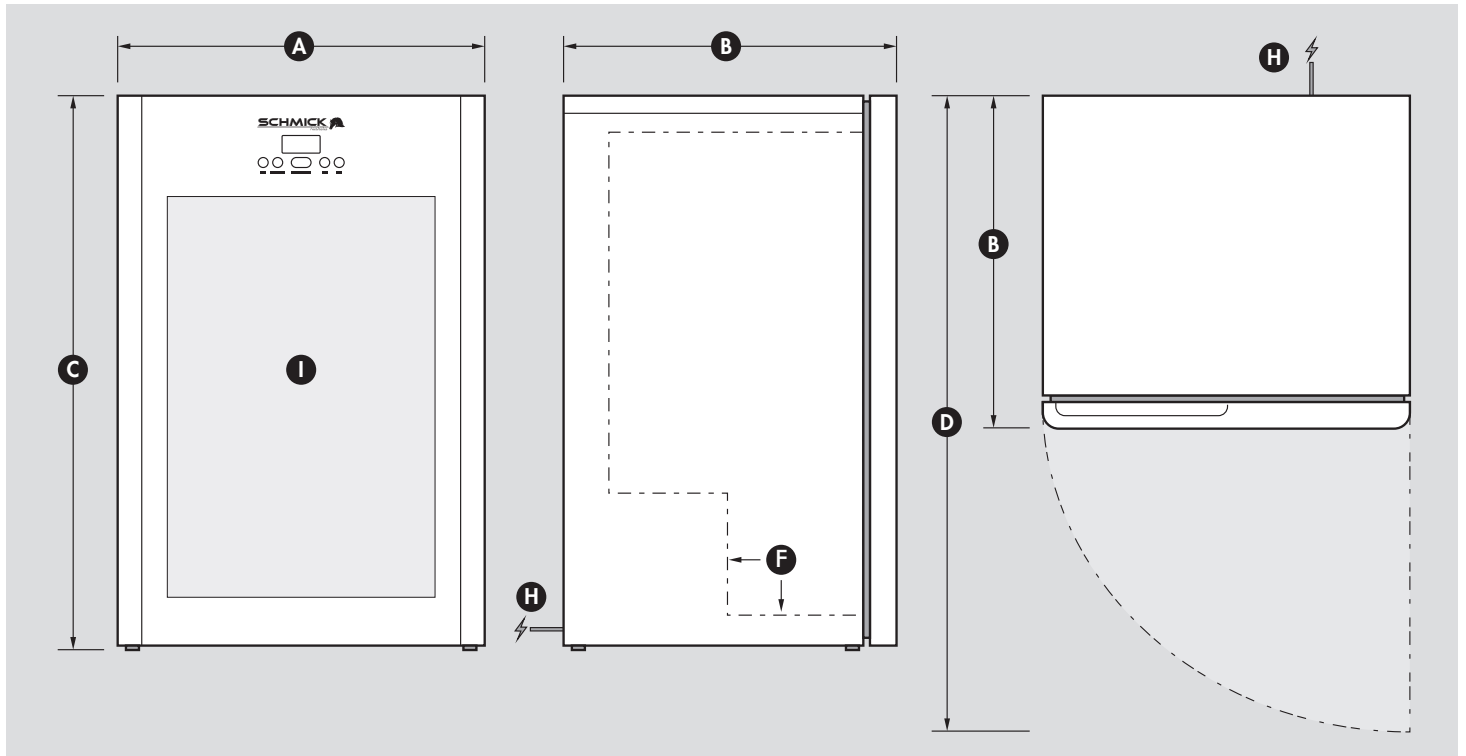

### INFORMATION

#### DIMENSIONS

Ⓐ	Overall width	560mm
Ⓑ	Overall depth	505mm
Ⓒ	Overall height - includes feet	850mm
Ⓓ	Overall depth with door open	1025mm
Ⓔ	Height of hinge cap (included in height above)	N/A
Ⓕ	Internal step inside unit	205mm In & 210mm High
Ⓖ	Depth of handle (adds to depth above)	N/A
Ⓗ	Power cord location & length	1800mm
Ⓘ	Internal dimensions (WxDxH)	445 x 360 x 705mmH

Note: Door opens within diameter of fridge

#### INSTALLATION & BUILDING INTO CAVITY'S

Minimum cavity size needed (WxDxH) 600 x 600 x 870mmH  
 Venting type of fridge REAR (Needs Min 20mm around unit & 100mm at rear)

**\*\*Note: If wanting a 'cabinet door' in front of fridge door please contact us\*\***

#### OTHER HELPFUL INFORMATION

Height floor to bottom of door	20mm
Door size (WxH)	560 x 825mmH
Feet height fully tightened	20mm
Height adjustment available on current feet	10mm
Change feet size for extra height option	Large Feet Can Add 20mm
Shelf Qty / Size (WxD)	3 x 460 x 350mmD
	1 x 460 x 235mmD
Wine Shelf available (Y/N)	Y

#### PERFORMANCE

Cooling	Cools To -5oC (Minus 5)
Application suitability	Indoor / Alfresco / Outdoor
Maximum operating ambient temperature	38°C
Outdoor IP official rating	No