

MODEL: SG1L-B

QUICK INFO

Units encompass the best brand name parts available in the world, designed by the best engineers and built by a quality long term manufacturer, to bring a reliable product to the market.

Polished stainless steel inner, Low Energy Compressor, LOW E glass to prevent condensation and energy saving German EBM fans make unit robust for tough conditions.

PARTS AND ENERGY INFO

- Cyclopentane foaming
- German energy saving EBM fans
- LED lighting
- LOW E glass
- R600 100% ozone safe gas
- Low Energy CompressorMeanwell Transformer From Taiwan



SPECIFICATIONS

129 Capacity (litres) 140 Holds (cans) 47 Noise Level

1.23Kwh/24Hrs Consumption 600 x 500 x 840 Unit dimensions (WxDxH)

Lockable Yes 50 kg Gross weight

www.rhinoequipment.eu


^{**}Specifications and price of this product may change at any time

^{**}For more information about this product please call us or visit our website.



PRODUCT INFORMATION

SG1L-B

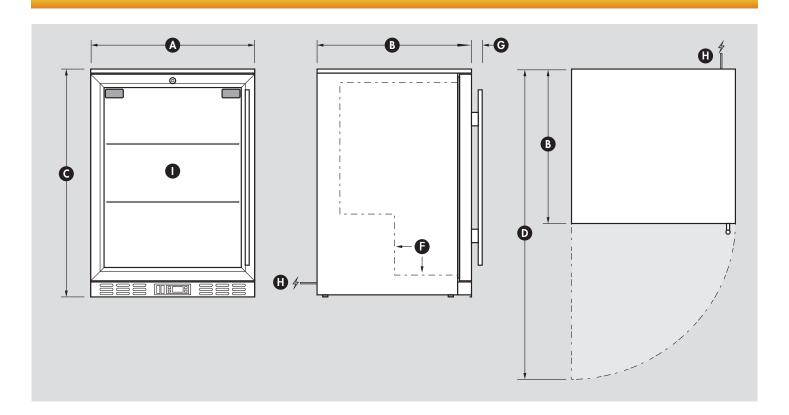

INFORMATION

DIMENSIONS

\bigcirc	Overall width		600mm
\bigcirc	Overall depth		495mm
(C)	Overall height - includes feet		840mm
(D)	Overall depth with door open		1070mm
E	Height of hinge cap (included in	n height above)	N/A
F	Internal step inside unit	190mm In & 190	mm High
G	Depth of handle (adds to depth	above)	40mm
\oplus	Power cord location & length		1800mm
	Internal dimensions (WxDxH)	520 x 380 x	680mmH

Note: Door opens maximum 3mm outside diameter

INSTALLATION & BUILDING INTO CAVITY'S

Minimum cavity size needed (WxDxH) 620 x 600 x 850mmH Venting type of fridge Front Venting, Through Grill

Note: If wanting a 'cabinet door' in front of fridge door please contact us

OTHER HELPFUL INFORMATION

	713
Height floor to bottom of door	65mm
Door size (WxH)	600 x 755mm
Feet height fully tightened	15mm
Height adjustment available on current feet	10mm
Change feet size for extra height option	30mm
Shelf Qty / Size	2 x (500mmW x 350mmD)
Wine Shelf available (Y/N)	Yes

PERFORMANCE

Cooling	Cools easily to (1oC)
Application suitability	Commercial / Alfresco / Indoor

Maximum operating ambient temperature	38oC IP22
Outdoor official IP rating	
Meps Energy Approved & Food Grade	Yes