

MODEL: SG1L-HD \$1867.00

QUICK INFO

Rhino all stainless heated glass door bar fridge, with brand name parts and designed by the best engineers , built by a quality long term manufacturer, to bring a reliable product to the market.

Polished stainless steel inner, low energy compressor, heated glass to stop condensation and German EBM fans make unit robust for tough conditions. Rhino technology produces one of the lowest energy heated glass options on the market.

PARTS AND ENERGY INFO

- Cyclopentane foaming
- German energy saving EBM fans
- LED lighting
- R600 100% ozone safe gas
- Meanwell Transformer From Taiwan
- Philips LED Lighting (Same Factory)



SPECIFICATIONS

Capacity (litres)
Holds (cans)
Noise Level
Consumption
Unit dimensions (WxDxH)
Lockable
Gross weight

129 140 47 2.23Kwh/24Hrs 600 x 500 x 840 Yes 65 kg




 $^{*\,*}\mbox{Specifications}$ and price of this product may change at any time

**For more information about this product please call us or visit our website.



PRODUCT INFORMATION

SG1L-HD

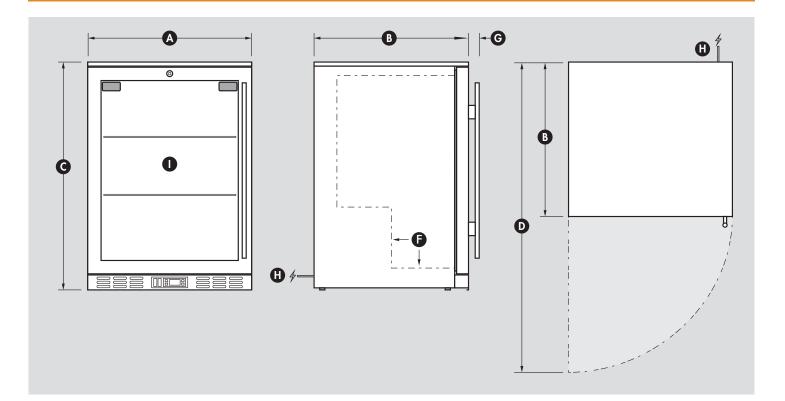

INFORMATION

DIMENSIONS

(A)	Overall width		600mm
B	Overall depth		495mm
Ô	Overall height - includes feet		840mm
Ď	Overall depth with door open		1070mm
Ē	Height of hinge cap (included in	height above)	N/A
F	Internal step inside unit	190mm In & 19	0mm High
Ğ	Depth of handle (adds to depth a	above)	40mm
Ĥ	Power cord location & length		1800mm
\bigcirc	Internal dimensions (WxDxH)	520 x 380 x	680mmH

Note: Door opens maximum 3mm outside diameter

INSTALLATION & BUILDING INTO CAVITY'S

Minimum cavity size needed (WxDxH)620 x 600 x 850mmHVenting type of fridgeFront Venting, Through Grill

Note: If wanting a 'cabinet door' in front of fridge door please contact us

OTHER HELPFUL INFORMATION

Height floor to bottom of door	65mm
Door size (WxH)	600 x 755mm
Feet height fully tightened	15mm
Height adjustment available on current fee	et 10mm
Change feet size for extra height option	30mm
Shelf Qty / Size	2 x (500mmW x 350mmD)
Wine Shelf available (Y/N)	Yes

PERFORMANCE

Cooling	Cools easily to (1oC)	
Application suitability	Commercial / Alfresco / Indoor	
Maximum operating ambient temper	ature 38oC	
Outdoor official IP rating		
Meps Energy Approved & Food Grad	le Yes	