

MODEL: SG1L-SD

QUICK INFO

Rhino all stainless 1 door solid stainless door bar fridge, with brand name parts and designed by the best engineers, built by a quality long term manufacturer, to bring a reliable product to the market.

Polished Stainless Steel Inner, low energy compressor and German energy efficient EBM fans make unit robust for tough conditions as well as extremely energy efficient.

PARTS AND ENERGY INFO

- Cyclopentane foaming
- German energy saving EBM fans
- LED lighting
- R600⁻100⁻% ozone safe gas
- Solid Door
- Low Energy CompressorMeanwell Transformer From Taiwan
- Philips LED Lighting (Same Factory)



SPECIFICATIONS

Capacity (litres) Holds (cans) Noise Level Consumption Unit dimensions (WxDxH) Lockable Gross weight

129 140 47 1.05Kwh/24Hrs 600 x 500 x 840 Yes 50 kg



**Specifications and price of this product may change at any time


**For more information about this product please call us or visit our website.

WWW.THEBBQSTORE.COM.AU



PRODUCT INFORMATION

SG1L-SD

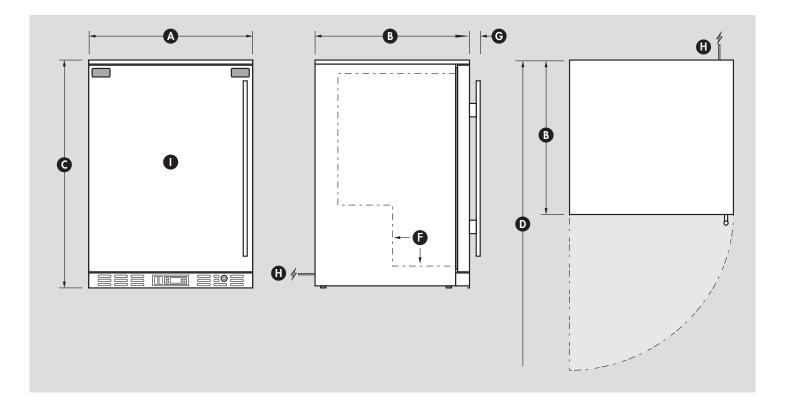

INFORMATION

DIMENSIONS

(A)	Overall width	600mm
B	Overall depth	495mm
Ô	Overall height - includes feet	840mm
\bigcirc	Overall depth with door open	1070mm
E	Height of hinge cap (included in	n height above) N/A
F	Internal step inside unit	190mm In & 190mm High
G	Depth of handle (adds to depth	above) 40mm
(H)	Power cord location & length	1800mm
\bigcirc	Internal dimensions (WxDxH)	520 x 380 x 680mmH

Note: Door opens maximum 5mm outside diameter

INSTALLATION & BUILDING INTO CAVITY'S

Minimum cavity size needed (WxDxH)620 x 600 x 850mmHVenting type of fridgeFront Venting, Through Grill

Note: If wanting a 'cabinet door' in front of fridge door please contact us

OTHER HELPFUL INFORMATION

Height floor to bottom of door	65mm
Door size (WxH)	600 x 755mm
Feet height fully tightened	15mm
Height adjustment available on current fee	et 10mm
Change feet size for extra height option	30mm
Shelf Qty / Size	2 x (500mmW x 350mmD)
Wine Shelf available (Y/N)	Yes

PERFORMANCE

Cooling	Cools easily to (1oC)	
Application suitability	Commercial / Alfresco / Indoor	
Maximum operating ambient temper	ature 38oC	
Outdoor official IP rating		

Meps Energy Approved & Food Grade Yes