

**MODEL:  
SG1R-B**

**QUICK INFO**

Units encompass the best brand name parts available in the world, designed by the best engineers and built by a quality long term manufacturer, to bring a reliable product to the market.

Polished stainless steel inner, Low Energy Compressor, LOW E glass to prevent condensation and energy saving German EBM fans make unit robust for tough conditions.

**PARTS AND ENERGY INFO**

- Cyclopentane foaming
- German energy saving EBM fans
- LED lighting
- LOW E glass
- R600 100% ozone safe gas
- Low Energy Compressor
- Meanwell Transformer From Taiwan
- Philips LED Lighting (Same Factory)



**SPECIFICATIONS**


Capacity (litres)	129
Holds (cans)	140
Noise Level	47
Consumption	1.23Kwh/24Hrs
Unit dimensions (WxDxH)	600 x 500 x 840
Lockable	Yes
Gross weight	50 kg

\*\*Specifications and price of this product may change at any time  
\*\*For more information about this product please call us or visit our website.



# PRODUCT INFORMATION

## SG1R-B

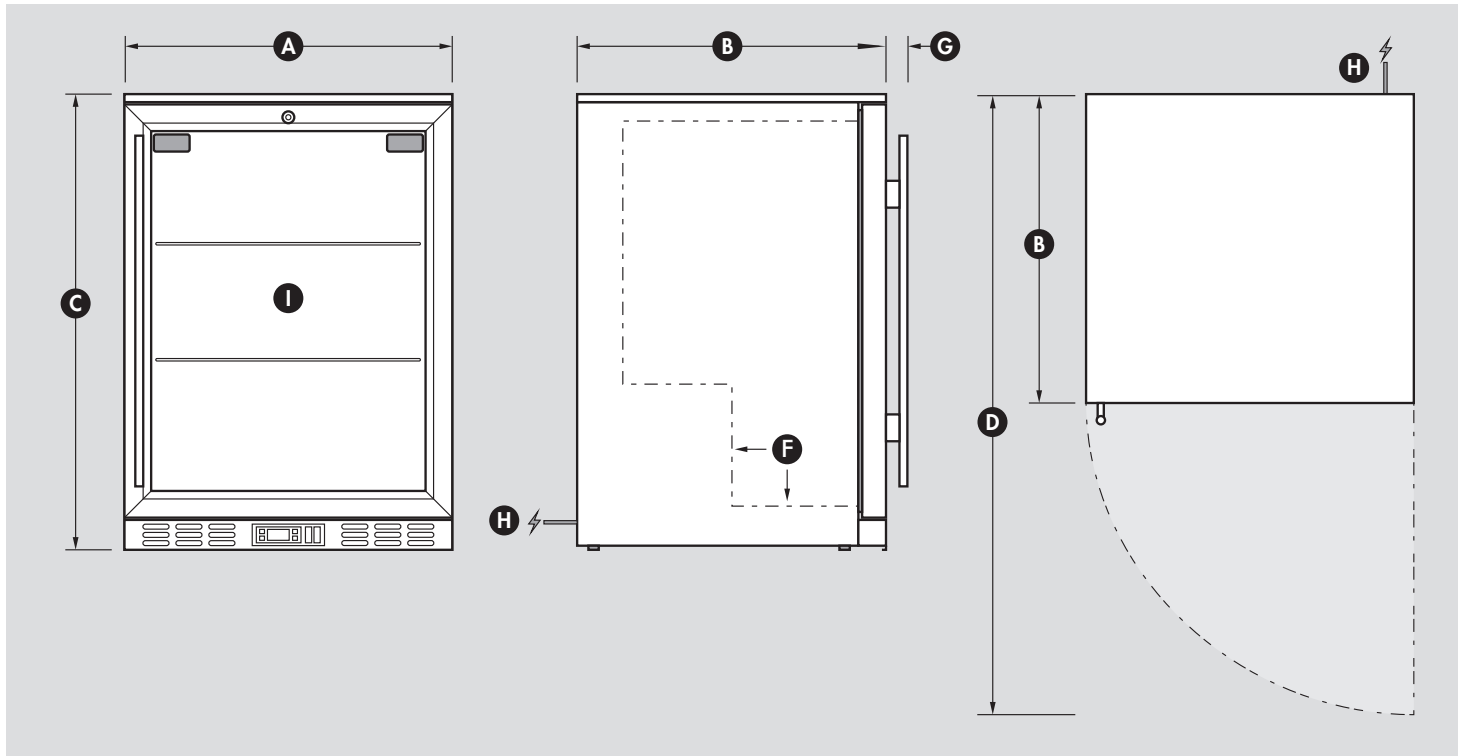

### INFORMATION

#### DIMENSIONS

Ⓐ	Overall width	600mm
Ⓑ	Overall depth	495mm
Ⓒ	Overall height - includes feet	840mm
Ⓓ	Overall depth with door open	1070mm
Ⓔ	Height of hinge cap (included in height above)	N/A
Ⓕ	Internal step inside unit	190mm In & 190mm High
Ⓖ	Depth of handle (adds to depth above)	40mm
Ⓗ	Power cord location & length	1800mm
Ⓘ	Internal dimensions (WxDxH)	520 x 380 x 680mmH

Note: Door opens maximum 3mm outside diameter

#### INSTALLATION & BUILDING INTO CAVITY'S

Minimum cavity size needed (WxDxH)	620 x 600 x 850mmH
Venting type of fridge	Front Venting, Through Grill

**\*\*Note: If wanting a 'cabinet door' in front of fridge door please contact us\*\***

#### OTHER HELPFUL INFORMATION

Height floor to bottom of door	65mm
Door size (WxH)	600 x 755mm
Feet height fully tightened	15mm
Height adjustment available on current feet	10mm
Change feet size for extra height option	30mm
Shelf Qty / Size	2 x (500mmW x 350mmD)
Wine Shelf available (Y/N)	Yes

#### PERFORMANCE

Cooling	Cools easily to (1oC)
Application suitability	Commercial / Alfresco / Indoor
Maximum operating ambient temperature	38oC
Outdoor official IP rating	IP22
Meps Energy Approved & Food Grade	Yes